

**MEGMEET**

**SHENZHEN MEGMEET ELECTRICAL CO., LTD.**

Add 1: 5th Floor, Block B, Unisplendour Information Harbor,  
Langshan Rd., Science & Technology Park, Nanshan District,  
Shenzhen, 518057, China


Add 2: 34th Floor, High-tech Zone Union Tower, No.63 Xuefu  
Road, Nanshan District, Shenzhen, 518057, China

# MEGMEET

Shenzhen Megmeet Electrical Co., Ltd.(Stock Code:002851) is a one-stop solution provider for the R&D, production, sales and services of hardware and software in electrical automation field, highlighting in power electronics and automatic control echnology. Company's main business covers six parts: power supply products, industrial automation, new energy vehicle& rail transit, intelligent equipment, smart appliance electronic control and precision connection.

Our company has established a strong platform of R&D, manufacturing, marketing and service with more than 2800 R&D personnel and a total of more than 7800 employees. We have established R&D centers in Shenzhen City, Changsha City, Xi'an City, Wuhan City, Zhuzhou City, Hangzhou City, Taizhou City and Chengdu City; overseas research institutes in the United States, Germany, and Sweden; manufacturing centers in Zhuzhou City, Dongguan City, Heyuan City, Taizhou City, and Yiwu City; overseas factories in Thailand and India; overseas marketing station in the United States, Japan, Korea, Southeast Asia, India, Germany, Poland, Romania, Turkey, Sweden to provide quality service resources.

MEGMEET is committed to helping people achieve a more efficient use of electricity, creating a cleaner living environment, continuously improving production efficiency and creating a better life for human beings. Our company aspires to become a global first-class product and solution provider in the field of electrical control and energy saving.

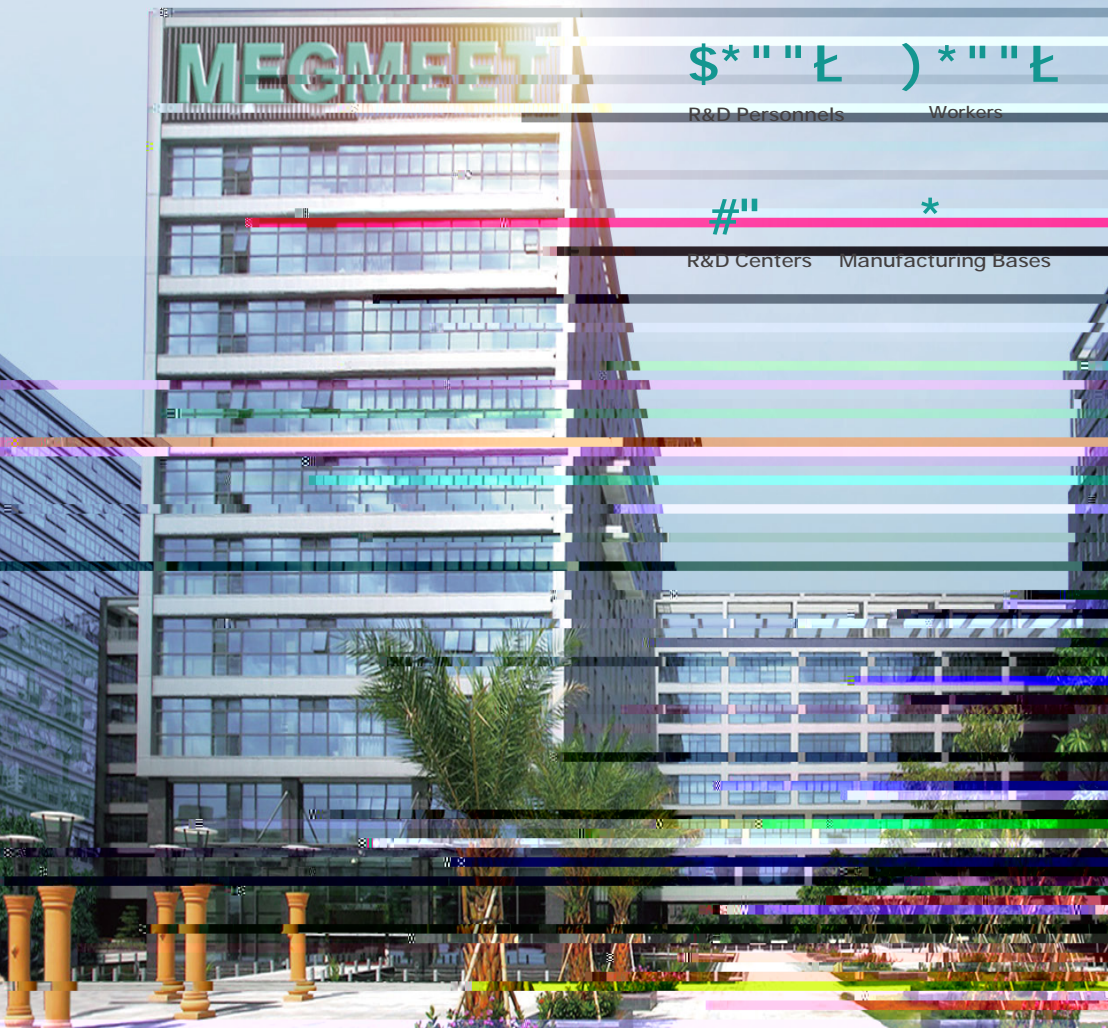

## 5a` fW fe

? F5! ? F5I ! ? F5HEVdVd

01/02

? CF EVdVd

03/04

? F57 EVdVd

05

? 53E EVdVd

06

? 6F EVdVd

07

3bb [USf[a` e

08

# MTC/MTCW/MTCV Series


## Series

### Product Overview

MTC/MTCW/MTCV series products are multi-channel and high-precision temperature controllers, which are suitable for various occasions of temperature control. Its main features are compatible with TC and RTD, high measurement accuracy; high integration (on module supports up to 12 channels of temperature control and 16 channels of measurement), space saving, easy data exchange for remote monitoring, and high cost performance.

### Product Feature

- Dedicated software** Provide special software - MtcCompanion
- Dual-PID function** Heating & cooling dual-PID control function, 14 alarms like upper and lower limits, deviation, etc.
- High precision** Intelligent self-tuning and multi-stage temperature setting functions to achieve high-precision temperature control.
- Multi-way control** Intelligent multi-channel temperature control to centralized data management.
- Easy exchange** Data exchange easily between thermostat and PLC, thermostat and HMI, thermostat and computer through Ethernet and serial port.



### Model Specification

Item	Description	
Power supply	24VDC -15% ~ 20%	
Signal input	Input type	Thermocouple K J E N T R B For all channel
		Thermal resistance Pt100 JPt100 Cu100 Ni120 For all channel
	Precision	Thermocouple 0.2% Full scale + cold compensation Thermal resistance 0.3% Full scale
	Sampling cycle	25ms/channel 100ms/8 channels 100ms/4 channels
Control output	Output form	Transistor output (SSR drive output), relay output, current output, voltage output
	Control action	Manual, ON / OFF, single PID, heating & cooling PID, position proportional PID
Alarm output	Alarm form	14 alarms, such as upper and lower limit alarm, deviation alarm and so on.
	Output form	Transistor and relay output (output state can be directly controlled by writing registers)
IO input	Output channel	8 channels
	Input form	Transistor input
IO input	Input channel	4 channels
	Control cycle	0.1s - 10s or 1s - 100s
Acquisition channel	4 channels and 8 channels	
Isolation	Exist between power and communication, power and channel, communication and channel, (MTCV)channel and channel	
Communication port	MTC/MTCV: One isolated RS485 serial port; support MODBUS slave and MCBUS slave protocol MTCW: One isolated + one non-isolated RS485 serial port, one Ethernet port; support MODBUS slave protocol	
Generals	Ambient temperature	Working: -20 ~ 60 °C, storage: -40 ~ 70 °C
	Ambient humidity	Working: 10 ~ 90% RH (no condensation), keeping: 5 ~ 95% RH (no condensation)
	Altitude	Below 2000m
	Protection level	IP20
C & S	Conform to IEC/EN 61326-1 For use in industrial locations UL61010-1 CE UL	

### Product Model

#### MTC series

Model	Acquisition channel	Temperature control output	Alarm output	Input type
MTC-04-NT	4-CH	Transistor (4-CH)	Flag bit	TC, RTD
MTC-08-NT	8-CH	Transistor (8-CH)	Flag bit	TC, RTD
MTC-04-NTT	4-CH	Transistor (4-CH)	Transistor(8-CH), flag bit	TC, RTD
MTC-04-NTR	4-CH	Transistor (4-CH) Relay (8-CH)	Relay(8-CH), flag bit	TC, RTD
MTC-04-NVT	4-CH	Transistor (4-CH) Current(8-CH 0-20mA or 4-20mA) Voltage(8-CH 0-1V 0-5V 0-10V or 1-5V)	Transistor (4-CH)	TC, RTD

#### MTCW series (Ethernet 2\*RS485)

Model	Acquisition channel	Temperature control output	Alarm output	Input type
MTCW-04-NTT	4-CH	Transistor (4-CH)	Transistor (4-CH), flag bit	TC, RTD
MTCW-04-NI	4-CH	Current (4-CH 0-20mA or 4-20mA)	Flag bit	TC, RTD
MTCW-04-NV	4-CH	Voltage (4-CH 0-1V 0-5V 0-10V or 1-5V)	Flag bit	TC, RTD
MTCW-08-NN	8-CH	-	Flag bit	TC, RTD
MTCW-08-NI	8-CH	Current (8-CH 0-20mA or 4-20mA)	Flag bit	TC, RTD
MTCW-08-NV	8-CH	Voltage(8-CH 0-1V 0-5V 0-10V or 1-5V)	Flag bit	TC, RTD
MTCW-08-NTT	8-CH	Transistor (8-CH)	Transistor (8-CH), flag bit	TC, RTD
MTCW-12-NT	12-CH	Transistor (12-CH)	Flag bit	TC, RTD
MTCW-16-NN	16-CH	-	Flag bit	TC, RTD
MTCW-08-CT	8-CH	Transistor (8-CH)	Flag bit	Current transformer (8-CH) TC, RTD
MTCW-08-NTD	8-CH	Transistor (8-CH heating, 8-CH cooling)	-	TC, RTD

#### MTCV series (Channel isolation RS485)

Model	Acquisition channel	Temperature control output	Alarm output	Input type
MTCV-16-NT	16-CH	Transistor (16-CH)	Flag bit	TC, RTD
MTCV-08-NT	8-CH	Transistor (8-CH)	Flag bit	TC, RTD






# MQT


## Series

### Product Overview

MQT series product, a new generation cascade temperature controller, is composed of communication module, temperature control module and expansion module, realizing high-precision temperature control by matching modules flexibly and integrating internal intelligent PID algorithm; it has the advantages of cascade, high precision, multi-point temperature control, background upgrade, free combination, small size and so on.

### Product Feature

-  **High precision** Measure precision: full scale of  $\pm 0.15\%$
-  **High performance** 0.1s sampling cycle and perfect PID self-tuning function, to achieve multi-channel cascade control
-  **Strong function** A single module can operate PID control and simple logic operation, and monitor analog value
-  **Simple installation** PUSH IN terminal, different terminals connection can be realized only need to gently push into
-  **Complete module** Digital I/O, analog I/O, CT input, temperature input, communication and others



### Product Model

### Model Specification

Item	Description
Power supply	24VDC -15% ~ 20%
Signal input	Thermocouple K J E N T R B For all channel
	Thermal resistance Pt100 JPt100 Cu100 Ni120 For all channel
	Thermocouple 0.15% Full scale + cold compensation
	Thermal resistance 0.3% Full scale
Control output	25ms/channel 100ms/8 channels 100ms/4 channels
	Transistor output (SSR drive output), relay output, current output, voltage output
Alarm output	Manual, ON / OFF, single PID, heating & cooling PID, position proportional PID
	14 alarms, such as upper and lower limit alarm, deviation alarm and so on.
	Transistor and relay output (output state can be directly controlled by writing register)
Digital input	
Control cycle	
Acquisition channel	
Isolation	
Communication port	RS485/Modbus-TCP/EtherNet/EtherCAT/Profinet
Generals	
C & S	

**MTCE**

Series

Product Overvg

